


## Half Beam Eccentric/Timing Setting

Eccentric Wheel is set approximately  $8^\circ$  forward of Crank Shaft, with Allen key in vertical position, Crank straight with Connecting Rod.



Rotate Eccentric Wheel  $90^\circ$  backwards to set Valve travel at bottom (Allen key horizontal). Rotate Eccentric Wheel  $90^\circ$  forward to set Valve travel at top.

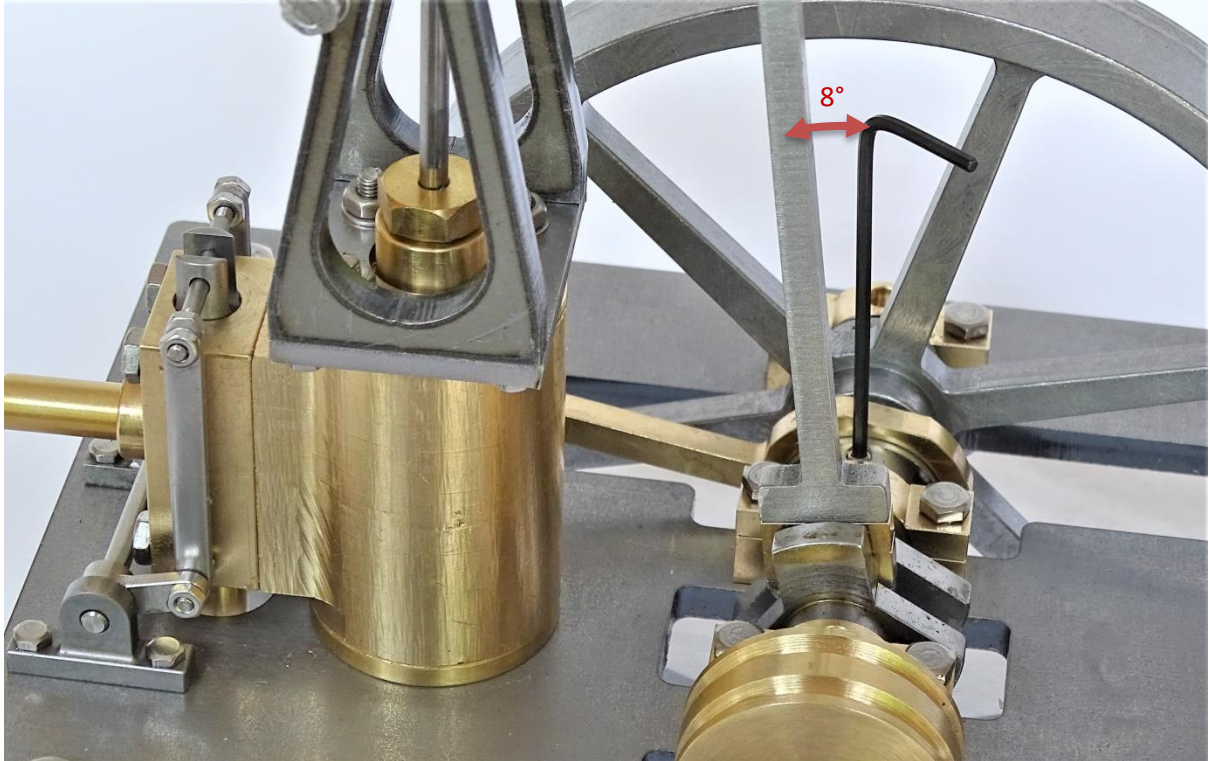